

AL61-SQ

Surface mounted light for wall and ceiling for outdoor use



The new Glamox AL60/61 is a robust designed family of luminaires with an elegant expression – specially designed for LED. The family consists of berth light, mirror light, circular light, two indoor square lights and two outdoor square lights. The luminaires fits applications like cabins, corridors, lounges and entrance areas. The AL60/61 family is designed and approved for marine demands.

Glamox states quality in design and gives the product 5 years warranty.

AL61-SQ, surface mounted for wall and ceiling for outdoor use

The AL61-SQ is watertight with a rating of IP65. The high IP rating in combination with a high impact resistance class, IK10, makes the luminaire the perfect solution for outdoor use. The AL61-SQ comes in two different sizes, with a square design of 290 and 340 mm and with three colour options, grey ,white or black. Due to the LED technology the light is energy saving and offers a long lifetime. The compact design enables an easy installation.

AL61-SQ



AL61-SQ 290 - black



AL61-SQ 290 - white



AL61-SQ 290 - grey



AL61-SQ 340 - grey



AL61-SQ 340 - black



AL61-SQ 340 - white

TECHNICAL DESCRIPTION

LIGHT SOURCE

Colour tolerances: MacAdams 3
 Colour rendering: CRI > 8
 Color temperature 3000K or 4000K on request
 Lifetime: Minimum 50 000 hour, L70 at max
 Ta=45°C or 50°C
 SQ290 LED 1100 lumen out
 SQ340 LED 2000 lumen out
 For precise lumen values please see the data sheet on item level

MOUNTING

Surface or wall mounting, fixed with 4 screws. Backside has 3 x M20 knock outs with grommets for fixed cable installation cable. Sides have 3 M20 knock outs with Quick seal grommets that takes cables from 7 to 11 mm in diameter. Push in terminal block 5 x 2 x 2.5 mm².

ELECTRIC

With integrated HF driver that also can be phase cut dimmed.

APPLICATION

Outdoor lighting at public areas

DESIGN

According to marine requirements

HOUSING AND OPTIC

The housing is made in solid die-cast aluminium IP54 and painted in polyester powder paint in colour grey (RAL 9006), White (RAL 9016) or Black (RAL 9005).


The diffuser is in impact resistant opal polycarbonate (PC).

DIMENSIONS


AL61-SQ 290 => 290 x 290 mm
 AL61-SQ 340 => 340 x 340 mm

AL61-SQ

MEASUREMENT DRAWINGS

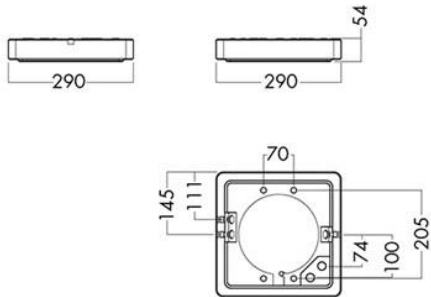


AL61-SQ 290

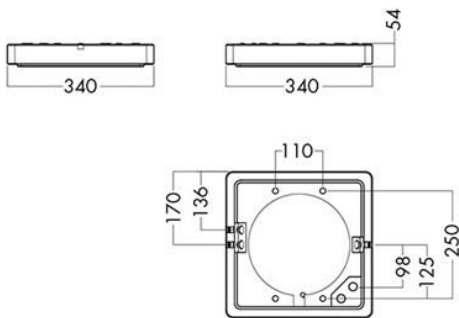

AL61-SQ 340

LIGHT MEASUREMENT DRAWINGS

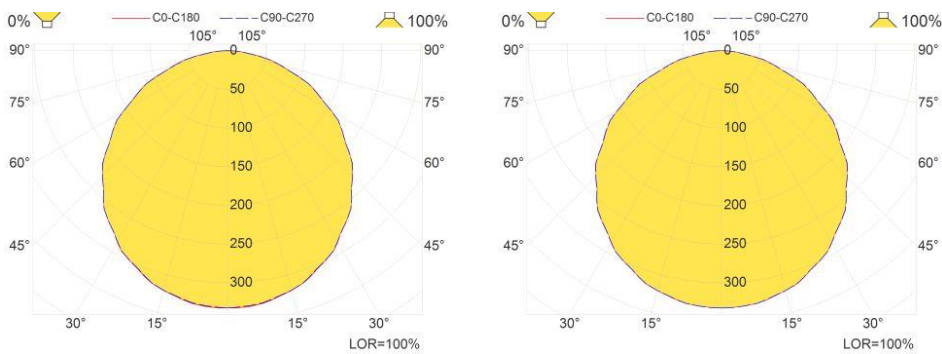

AL61-SQ

GALLERY




AL61-SQ



AL61-SQ



AL61-SQ 340 - grey, wall mounted



Available decors