


Series 70M

Double lens navigation lights



- Unbreakable and extremely reliable
- Main and stand-by light in one housing

Application

All vessels ≥ 20 m in length. Lights marked  may also be used on inland waterways without limitation of ship's length

Housing

Polycarbonate, glass fibre reinforced, other components of non-corrosive materials. Housing self-ventilated. Nonmagnetic, seawater resistant

Housing colour

Mat black



Easy change of bulb with only one hand.

Electric

Main lighting (upper unit) and spare lighting (lower unit) each come with 1.5 m special connection cable 2 x 1.5 mm², self-protective insulation, class II

Mounting

Base flange attachment, 4 screws (not included). Allround lights may also be hoisted. Additional mounting aids see drawing

Lamp

Easy to change. 2 tungsten bulbs

Approvals

a) International according to IMO 1972, in Scandinavian countries too, in Germany through BSH, other countries in particular see list of approvals

b) US-Coastguard, China Classification Society. These lights may only be used on ships flying the flags of the USA or P.R. China

Cable insert

2 special cable glands metric pressure screw M24 x 1.5 with protection against buckling

Min. visibilities

3 n.m., masthead light 6 n.m.

Optics

Seawater resistant, special plastic Fresnel lenses


More variants are available on request. Complete assortment on www.glamox.com/gmo

Product	Part-No. 24V/24V 40W/40W	Part-No. 110V/110V 60W/60W	Part-No. 230V/230V 65W/65W	Part-No. 24V/230V 40W/65W	Part-No. 24V/110V 40W/60W	Part-No. 110V/230V 60W/65W	Part-No. USCG/CCS 24/110/230V*	Weight kg	Base Code
70M STARBOARD GREEN	3583103000	3583104000	3583105000	3583106000	3583107000	3583108000	3583109000	5.9	P28s
70M PORT RED	3584203000	3584204000	3584205000	3584206000	3584207000	3584208000	3584209000	5.9	P28s
70M MASTHEAD WHITE	3581003000	3581004000	3581005000	3581006000	3581007000	3581008000	3581009000	5.9	P28s
70M STERN WHITE	3582703000	3582704000	3582705000	3582706000	3582707000	3582708000	3582709000	5.9	P28s
70M STERN YELLOW	3582403000	3582404000	3582405000	3582406000	3582407000	3582408000	3582499000	5.9	P28s
70M SIGNAL WHITE	3580703000	3580704000	3580705000	3580706000	3580707000	3580708000	3580009000	5.6	P28s
70M SIGNAL RED	3580203000	3580204000	3580205000	3580206000	3580207000	3580208000	3580209000	5.6	P28s
70M SIGNAL GREEN	3580103000	3580104000	3580105000	3580106000	3580107000	3580108000	3580109000	5.6	P28s
70M SIGNAL YELLOW	3580403000	3580404000	3580405000	3580406000	3580407000	3580408000	3580499000	5.6	P28s

*Lamp not included., for USCG/CCS


Product	Visible angle
70M STARBOARD GREEN	112.5°
70M PORT RED	112.5°
70M MASTHEAD WHITE	225°
70M STERN WHITE	135°
70M STERN YELLOW	135°
70M SIGNAL WHITE	360°
70M SIGNAL RED	360°
70M SIGNAL GREEN	360°

Spare Parts/ Accessories

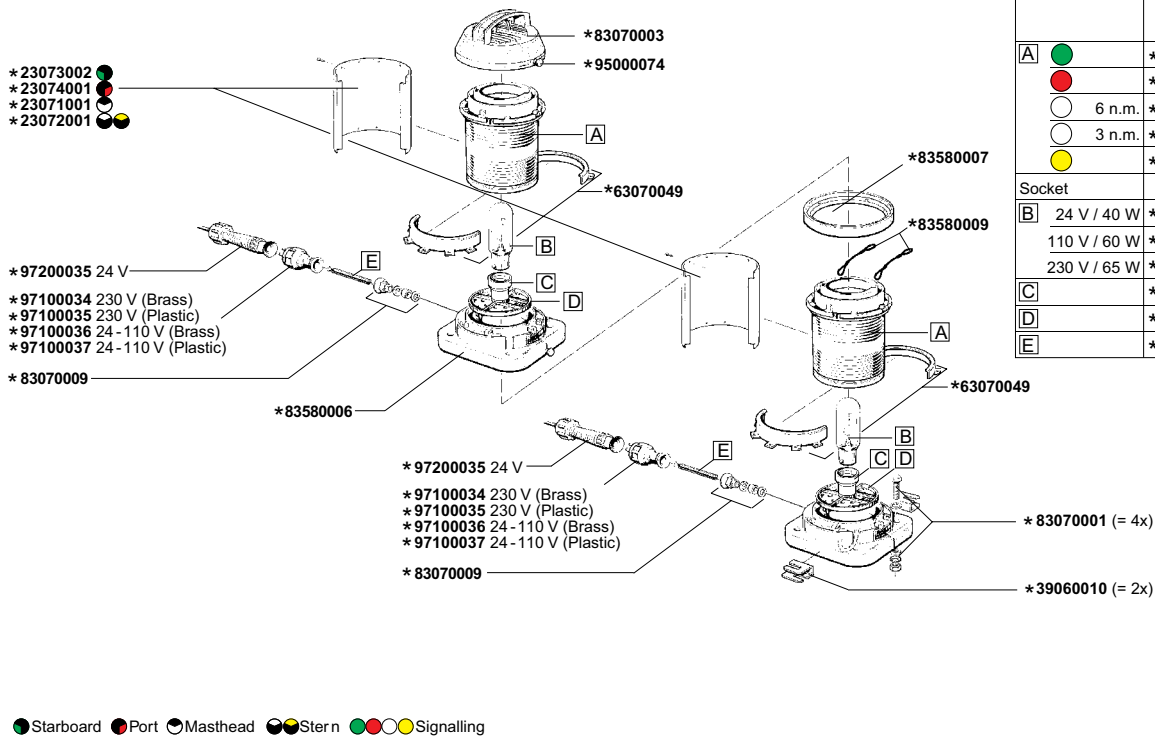

	IMO	BSH	USCG	CCS
A	●	*83070005	*83070018	
	●	*83070006	*83070019	
	○	6 n.m. *83070004	*83070017	
	○	3 n.m. *83072001	*83072005	
	●	*83070007	*83072006	
Socket		(P 28s)	(P 28s)	
B		24 V / 40 W *90400171	*90400171	
		110 V / 60 W *90400172	*90400172	
		230 V / 65 W *90400173	*90400173	
C		*83070008	*83070022	
D		*83070002	*83070021	
E		*63070014	*23070074	

● Starboard ● Port ● Masthead ● Stern ● Signalling

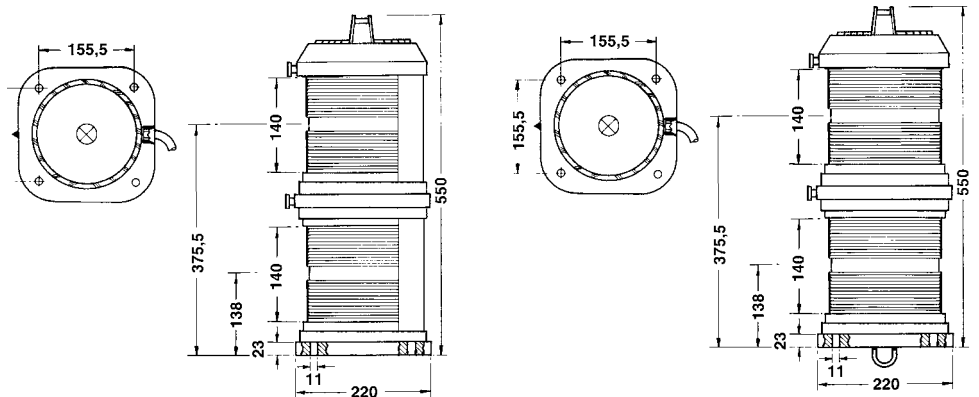

HOISTABLE VERSION
(allround lights)